




2~42 Core

44~72 Core

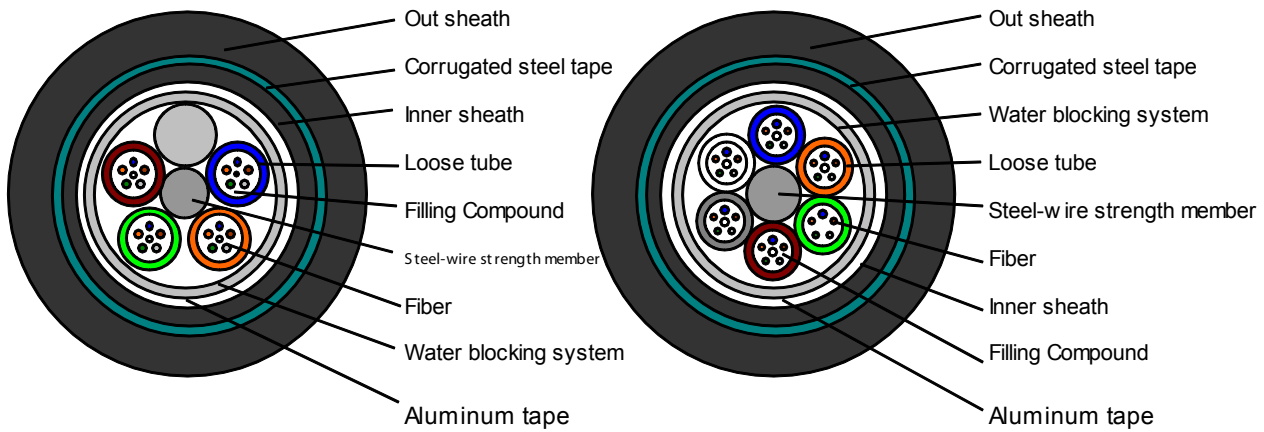

### Application ::

- .Adopted to Outdoor distribution.
- .Suitable for aerial duct and buried method.
- .Long distance and local area network communication.

### Characteristics ::

- .Steel wire strength.filler protect tube fiber.steel tape armor
- .Good ultra violet radiation resistant property.
- .Double sheath and Double armored..Good moisture-resistance.

### Technical Parameters:

Cable Count	Out sheath Diameter (MM)	Weight (KG)	Minimum allow able Tensile Strength (N)		minimum allow able Crush Load (N/100mm)		Minimum Bending Radius (MM)		Storage temperature (°C)
			short term	long term	short term	long term	short term	long term	
24	14,5	210,00	3000	1000	3000	1000	20D	10D	-40+60
36	14,5	210,00	3000	1000	3000	1000	20D	10D	-40+60
42	14,5	210,00	3000	1000	3000	1000	20D	10D	-40+60
48	15,5	245,00	3000	1000	3000	1000	20D	10D	-40+60
60	15,5	245,00	3000	1000	3000	1000	20D	10D	-40+60
72	15,5	245,00	3000	1000	3000	1000	20D	10D	-40+60



## Denominate:

<b>GY</b>	<b>NOCODE</b>	<b>T</b>	<b>A53</b>		GY:	Outdoor Cable
				<b>Sheath Structure Strength member Sort</b>	NOCODE:	Metal strength member
					T:	Filling Compound
					A53:	Aluminum tape + Out sheath Steel tape+ Out sheath

## Optical Characteristics

Fiber Sort	Multimode	G.651	A1a:50/125	Graded-index fiber
			A1b:62.5/125	
	Singlemode	G.652(A, B, C, D)		B1.1:Conventional fiber
		G.653		B2: Zero dispersion shifted
		G.654		B1.2 :Cut-off wavelength shifted
		G.655	B4: Main technical data for positive dispersion shifted single-mode fiber	

