




2~42 Core

44~72 Core

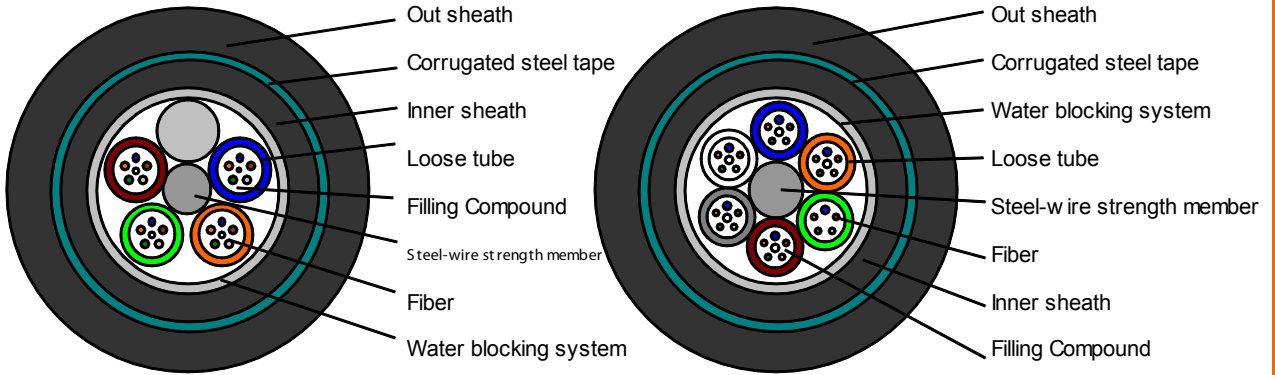

### Application ::

- .Adopted to Outdoor distribution.
- .Suitable for aerial duct and buried method.
- .Long distance and local area network communication.


### Characteristics ::

- .Steel wire strength, filler protect tube fiber, steel tape armor.
- .Good ultra violet radiation resistant property.
- .Double sheath .Good moisture-resistance.

### Technical Parameters:

Cable Count	Out sheath Diameter (MM)	Weight (KG)	Minimum allow able Tensile Strength (N)		minimum allow able Crush Load (N/100mm)		Minimum Bending Radius (MM)		Storage temperature (°C)
			short term	long term	short term	long term	short term	long term	
24	12,0	155,00	4000	3000	3000	1000	20D	10D	-40+60
36	12,0	155,00	4000	3000	3000	1000	20D	10D	-40+60
42	12,0	155,00	4000	3000	3000	1000	20D	10D	-40+60
48	13,0	210,00	4000	3000	3000	1000	20D	10D	-40+60
60	13,0	210,00	4000	3000	3000	1000	20D	10D	-40+60
72	13,0	210,00	4000	3000	3000	1000	20D	10D	-40+60

### Denominate:

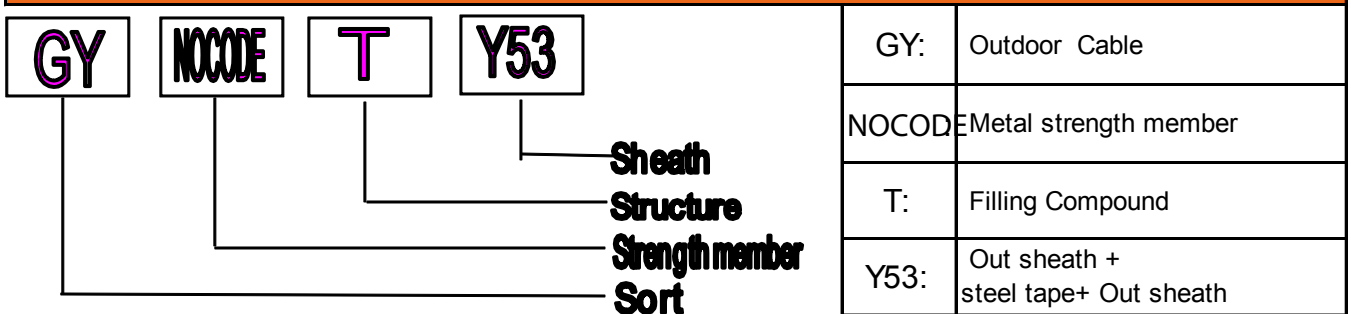

### Optical Characteristics

Fiber Sort	Multimode	G.651	A1a:50/125	Graded-index fiber
			A1b:62.5/125	
Fiber Sort	Singlemode	G.652(A, B, C, D)		B1.1:Conventional fiber
		G.653		B2: Zero dispersion shifted
		G.654		B1.2 :Cut-off wavelength shifted
		G.655		B4: Main technical data for positive dispersion shifted single-mode fiber

