

Application ::

- .Adopted to indoor distribution.
- .As pigtail of communication equipment.
- .Suitable for communication equipment served.
- .Suitable for floor connection.


Characteristics ::

- .High strength kevlar yarn member.
- .More tight buffered design.
- .Round construction.
- .Soft. Easy to strip.

Technical Parameters:

Cable Count	Outside Diameter (MM)	Tight buffer Diameter (MM)	Weight (KG)	Minimum allow able Tensile Strength (N)		minimum allow able Crush Load (N/100mm)		Minimum Bending Radius (MM)		Storage temperature (°C)
				short term	long term	short term	long term	short term	long term	
02	3,0	0,9	15,00	600	200	1000	200	20D	10D	-20+60
04	4,0	0,9	22,00	600	200	1000	200	20D	10D	-20+60
06	4,0	0,9	23,00	600	200	1000	200	20D	10D	-20+60
08	5,0	0,9	27,00	600	200	1000	200	20D	10D	-20+60
10	5,5	0,9	30,00	600	200	1000	200	20D	10D	-20+60
12	6,0	0,9	35,00	600	200	1000	200	20D	10D	-20+60

Denominate:

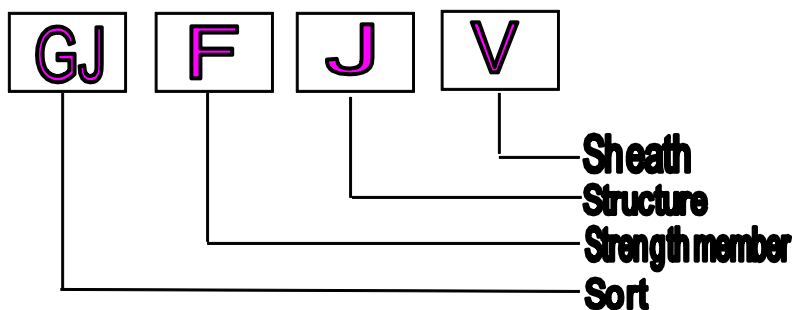

GJ:	Indoor cable
F:	Non-metal central strength member
J:	Tight buffer
V:	pvc or Iszh out sheath



Optical Characteristics

Fiber Sort	Multimode	G.651	A1a:50/125	Graded-index fiber
			A1b:62.5/125	
	Singlemode	G.652(A、B、C、D)		B1.1:Conventional fiber
		G.653		B2: Zero dispersion shifted
		G.654		B1.2 :Cut-off wavelength shifted
		G.657A1		
		G.655		B4: Main technical data for positive dispersion shifted single-mode fiber

